


WL3Fe LINE ARRAY DRIVER Preliminary Data Sheet

KEY FEATURES


- 1,75" (44,4 mm) edgewound aluminium ribbon voice coil
- Improved moving assembly mechanical coupling for excellent power handling capabilities
- PM-4 polymer diaphragm
- 70 W_{AES} power above 1,8 kHz
- 140 W program power above 1,8 kHz
- Sensitivity 102 dB (1W / 1m) coupled to a 90° x 5° horn
- Excellent for line array applications (weight 1,7 kg)
- Ferrite magnet

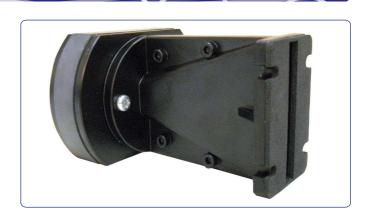

TECHNICAL SPECIFICATIONS

Throat diameter Rated impedance	20,5 mm	0,8 in 8 Ω
Minimum impedance	5,1 Ω @ 3,4 kHz	
D.C. resistance		4,3 Ω
Power capacity*	70 W _{AES} above	1,8 kHz
Program power	140 W above	1,8 kHz
Sensitivity**	102 dB 1W / 1	m @ Z _N
	coupled to a 90° x	5° horn
Frequency range	1 -	- 18 kHz
Recommended crossover	1,8 kHz or higher	
	(12 dB/oct min.)	
Voice coil diameter	44,4 mm	1,75 in
Flux density		1,6 T

FREE AIR IMPEDANCE CURVE




MOUNTING INFORMATION

4,8 N/A

Overall diameter	115 mm	4,50 in
Depth	150 mm	5,91 in
Mounting	Four 6 mm diameter holes	
Net weight (1 unit)	1,7 kg	3,75 lb
Shipping weight (2 units)	3,6 kg	7,94 lb

ON FREQUENCY RESPONSE



Note: On axis frequency response measured in anechoic chamber, 1W / 1m

Notes:

BI factor

beyma //

Polígono Industrial Moncada II • C/. Pont Sec, 1c • 46113 MONCADA - Valencia (Spain) • Tel.: (34) 96 130 13 75 • Fax: (34) 96 130 15 07 • http://www.beyma.com • E-mail: beyma@beyma.com •

^{*} The power capaticty is determined according to AES2-1984 (r2003) standard. Program power is defined as the transducer's ability to handle normal music program material.

^{**} Sensitivity was measured at 1m distance, on axis, with 1W input, averaged in the range 2 - 7 kHz.