


DESCRIPTION

The D-983 is a remote control module designed for used with the D-901 Digital Mixer, etc. It permits preset memory recall, input/output channel volume control, stereo input selection and channel ON/OFF operation to be remotely controlled from external equipment. Tally output can also be provided for external control.

SPECIFICATIONS

Contact Input	COM + Terminal 1 - 24: Open voltage: 5 V DC, short-circuit current: 5 mA, RJ45 connector X 4
Control	
Preset Memory Selection	Any preset memory can be recalled. Control method: No-voltage make of over 100 ms/ No-voltage make single pulse of over 100 ms
Volume Control	Any input/output channel volume can be turned UP or DOWN. Control method: 1 step variation for no-voltage make single pulse of over 100 ms 1 step continuous operation for every 70ms for no-voltage make of over 100ms. Can be reset when at break. Variable Range: $-\infty$ dB to +10 dB
Channel	Any input/output channel can be turned ON and OFF. Control method: No-voltage make of over 100 ms/ No-voltage make single pulse of over 100 ms
Stereo Selection	Input channel lines of the D-936R (optional), or the D-937SP (optional) (4 stereo input module) can be selected. Control method: No-voltage make of over 100 ms/ No-voltage make single pulse of over 100 ms
Contact Output	COM + Terminals 1 - 16: No-voltage make contact, contact capacity: 24 V DC, 100 mA, RJ45 connector X 4
Finish	Panel: Pre-coated steel plate, black, 30% gloss
Dimensions	35 (W) x 119.5 (H) x 178.4 (D) mm
Weight	170 g

APPEARANCE

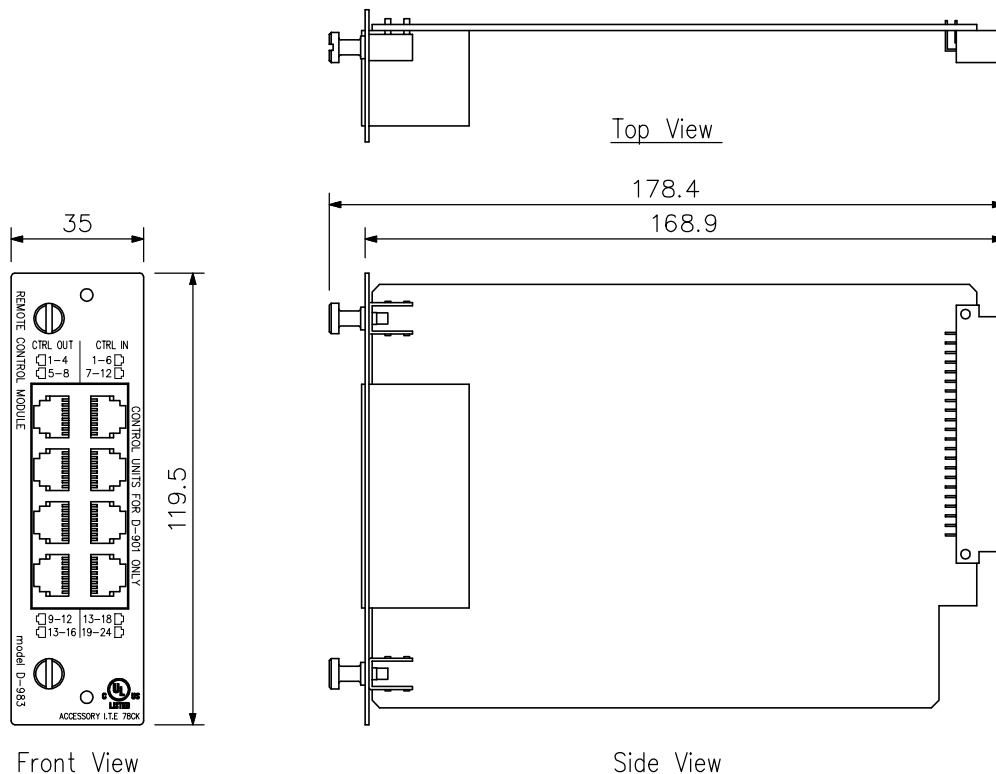

UNIT: mm SCALE: 1/2