

## DESCRIPTION

The PP-025B operates on 24 V DC and provides 8 inputs. Each input 1, 2 and 3 is provided with a priority circuit to allow them to override the other inputs. The optional CK-025 chime unit can be built-in the panel.


## SPECIFICATIONS

\* 0 dB = 1 V


Power Source	24 V DC
Power Consumption	Under 200 mA
Inputs	Input 1-A: -2/-62 dB*, 600 Ω, balanced, phone jack Input 1-B: -2 dB*, 600 Ω, balanced, phone jack Input 2-A: -2/-62 dB*, 600 Ω, balanced, phone jack Input 2-B: -2 dB*, 600 Ω, balanced, phone jack Input 3-A: -2 dB*, 20 kΩ, unbalanced, phone jack Input 3-B: -2 dB*, 20 kΩ, unbalanced, phone jack Input 3-C: -2/-22 dB*, 50 kΩ, unbalanced, phone jack/pin jack Input 3-D: -22 dB*, 50 kΩ, unbalanced, pin jack
Outputs	Line out 1: 0 dB*, 600 Ω, balanced, all inputs (Inputs 1/2 are output when using the line out 2.) Line out 2: 0 dB*, 600 Ω, unbalanced (Input 3 is output.) Rec out : -10 dB*, 5 kΩ, unbalanced (Inputs 1/2 are output when using the line out 2.)
Frequency Response	50 - 15,000 Hz ±3 dB (at 1 kHz)
Tone Control	100 Hz, 10 kHz ±10 dB
S/N Ratio	Over 60 dB
Distortion	Under 1 %
Priority	Priority order: Input 1 > Input 2 > Input 3 Priority signal: Input level
Finish	Panel: Pre-coated steel plate, black, 30%, gloss
Dimensions	482 (W) × 88.4 (H) × 218 (D) mm
Weight	3 kg
Accessory	Phone plug/phone plug connection cord (balanced) ..... 1, Power supply cable ..... 1, Rack mounting screw (with washer) ..... 4, Rack mounting bracket (preinstaaled on the unit) ..... 2, Input indication label ..... 1, 5P DIN plug ..... 1
Option	Chime unit: CK-025

## APPEARANCE


Rear View

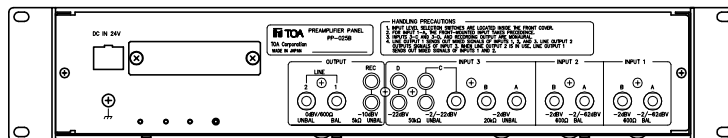


Front View

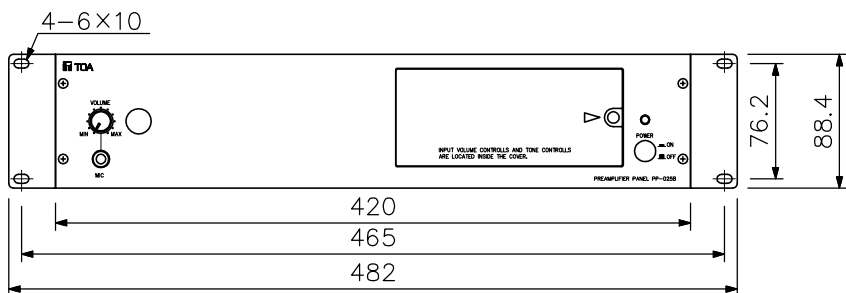

PP-025B without the front cover

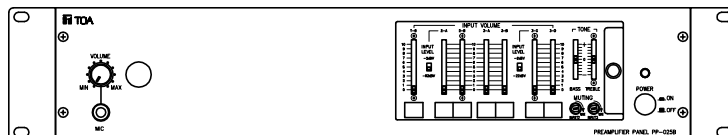

Side View

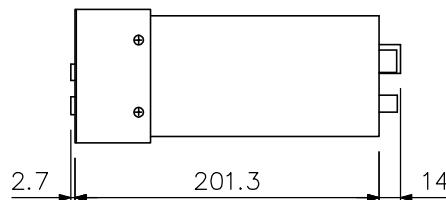

UNIT:mm SCALE:1/5