


unbalanced

Patch / Studio / Outdoor

IY104

Unbalanced Patch Cable

- extremely flexible
- spiral shield
- only 4.0 mm outer diameter

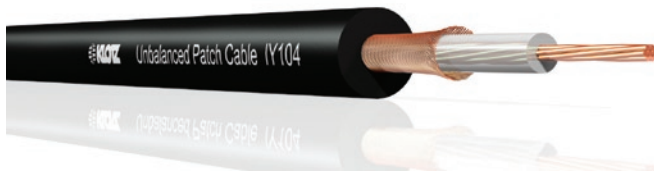

This cost effective unbalanced cable is the right choice when mechanical loads are minimal, e.g. rack internal wiring of Line-Level devices. Shielded by a very dense copper spiral shield it can be used to strong fields of interference.

Das kostengünstige unsymmetrische Kabel kann überall dort eingesetzt werden, wo die mechanische Beanspruchung gering sind, wie z.B. Rack-Innenverdrahtung von Line-Level Geräten. Geschirmt durch einen sehr dichten Kupfer-Wendelschirm ist es auch in der Nähe starker Streufelder einsetzbar.

Conductor	stranded bare copper, 7 x 0.20 mm
Cross Section	0.22 mm ²
Insulation	PE
Shielding	bare copper spiral shield
Outer Jacket	PVC, matt
Overall Diameter	4.0 mm

Leiteraufbau	blanke Cu-Litze, 7 x 0,20 mm
Leiterquerschnitt	0.22 mm ²
Isolation	PE
Abschirmung	blanker Cu-Wendelschirm
Außenmantel	PVC, matt
Außendurchmesser	4,0 mm

Min. Bending Radius	20 mm
Working Temperature	-20 °C / +70 °C

Min. Biegeradius	20 mm
Betriebstemperatur	-20 °C / +70 °C

Conductor Resistance	< 85 Ω/km
Capacitance	130 pF/m
Insulation Resistance	> 1 GΩ x km

Leiterwiderstand	< 85 Ω/km
Kapazität	130 pF/m
Isolationswiderstand	> 1 GΩ x km

SW [black]

Order Code Bestell-Nr.	Colour Farbe	Weight Gewicht	Standard Length [m] Standard Längen [m]	Max. Length / Reel Max. Länge / Spule
IY104SW	black	20 g/m	100 / 300	1000 m