

The **M Cap® SUPREME** has been internationally acclaimed as the ultimate high-end capacitor. It is considered today by many users as a milestone in the modern audiophile capacitor generation. Its outstanding sound performance is achieved with a unique combination of advanced technologies: Special induction-free SUPREME winding technology. (see also page 9)

Its subtle fine gradation of the high tone range invigorates the entire sound production; voices and instruments take shape and become extremely diverse.


Technical specifications:

Dielectric: Polypropylene

Dielectric strength: 600 - 1400 VDC

Loss factor: $\tan \delta = 0.0002@1\text{ kHz}$; $0.0001@10\text{ kHz}$

Permissible ambient temperature $85^\circ\text{C}/185^\circ\text{F}$

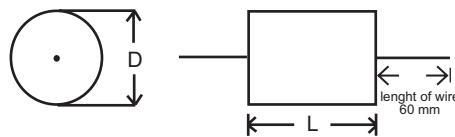

SUP8

Supreme capacitors

Capacity [µF] ±5%	VDC	Body Ø * L [mm]	Wire Ø * L [mm]	[€]
0,10	1400	17 * 36	0,8 * 60	7,99
0,22	1400	20 * 38	1,0 * 60	8,99
0,33	1400	25 * 56	1,0 * 60	9,99
0,47	600	20 * 39	1,0 * 60	10,90
0,68	600	20 * 39	1,0 * 60	11,90
1,0	600	20 * 39	1,0 * 60	13,50
1,5	600	25 * 52	1,0 * 60	14,90
1,8	600	25 * 52	1,0 * 60	16,50
2,2	600	25 * 52	1,0 * 60	16,50
2,7	600	30 * 56	1,0 * 60	17,90
3,3	600	30 * 56	1,4 * 60	19,50
3,9	600	30 * 56	1,4 * 60	20,90
4,7	600	36 * 56	1,4 * 60	22,90
5,6	600	36 * 56	1,4 * 60	25,90
6,8	600	41 * 53	1,4 * 60	28,90
8,2	600	36 * 106	1,4 * 60	31,90
10	600	36 * 106	1,4 * 60	35,90
15	600	41 * 106	1,4 * 60	47,90
18	600	41 * 106	1,4 * 60	59,90
22	600	50 * 106	1,4 * 60	59,90