


### DESCRIPTION

The IR-520R Infrared Wireless Receiver is designed for exclusive use with the IR-702T Infrared Wireless Tuner. It can be mounted to a wall or a microphone stand.

### SPECIFICATIONS

Power Source	24 V DC (supplied from the IR-702T)
Current Consumption	Max. 30 mA
Infrared Detector	
Wavelength	870 nm
Carrier Frequency	Channel A: 3.100 MHz Channel B: 3.350 MHz
Communication Area	Approx. 15 m (50 ft) in a space without any obstacles
Connection Terminal	75 Ω, BNC jack
Operating Temperature	0 °C to +40 °C (32 °F to 104 °F)
Operating Humidity	30 % to 85 %RH (no condensation)
Finish	Filter section: Polycarbonate, optical cut filter
Dimensions	84.5 (W) × 63.5 (H) × 32 (D) mm (3.33" × 2.5" × 1.26")
Weight	100 g (0.22 lb) (unit only)
Accessory	Stand mounting bracket ×1, Bracket mounting screw ×2

### APPEARANCE

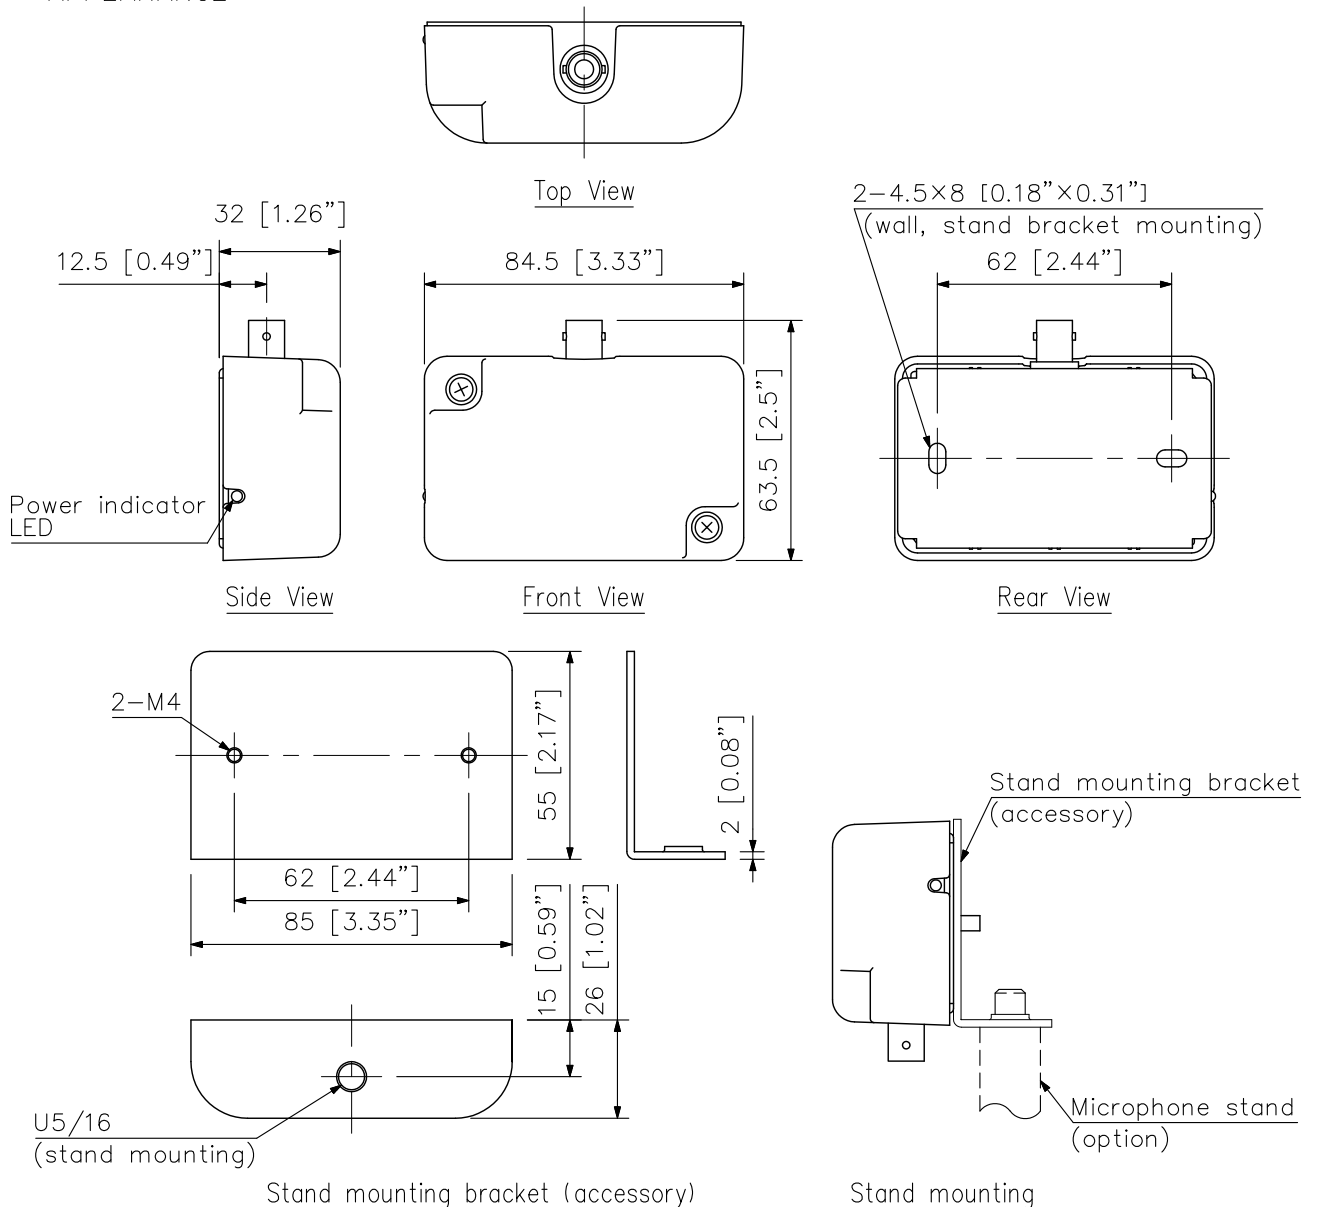

UNIT:mm SCALE:1/2