


DESCRIPTION

The SR-H3L Line Array Speaker forms a linear sound source by the internal speaker units arrayed vertically in close proximity. It can be used for high-impedance applications with the installation of the optional MT-S0301 Matching Transformer.

SPECIFICATIONS

| | |
|-------------------------|---|
| Enclosure | Bass-reflex type |
| Power Handling Capacity | Continuous program: 360 W |
| Rated Impedance | 8 Ω |
| Sensitivity | 95 dB (1 W, 1 m equivalent, measured at 8 m) |
| Frequency Response | 110 Hz - 18 kHz (when using an optional digital processor) |
| Directivity Angle | Horizontal: 90° Vertical: 0° (within the range of speaker height) |
| Speaker Component | 7 cm (2.8") cone-type X 16 |
| Input Connector | Removable input connector |
| Finish | Enclosure: MDF, white, urethane paint Front grille: Punched steel plate, white, acrylic paint |
| Dimensions | 84 (W) X 1186.4 (H) X 115 (D) mm (3.31" X 46.71" X 4.53") |
| Weight | 7.6 kg (16.75 lb) |
| Option | Matching transformer: MT-S0301 Extension plate: SR-EP3 Wall mounting bracket: SR-WB3 Wall tilt bracket: SR-TB3 Flying bracket: SR-FB3 Stand adapter: SR-SA3 (Applicable stand: ST-34B) Digital processor: DP-0206 |

APPEARANCE

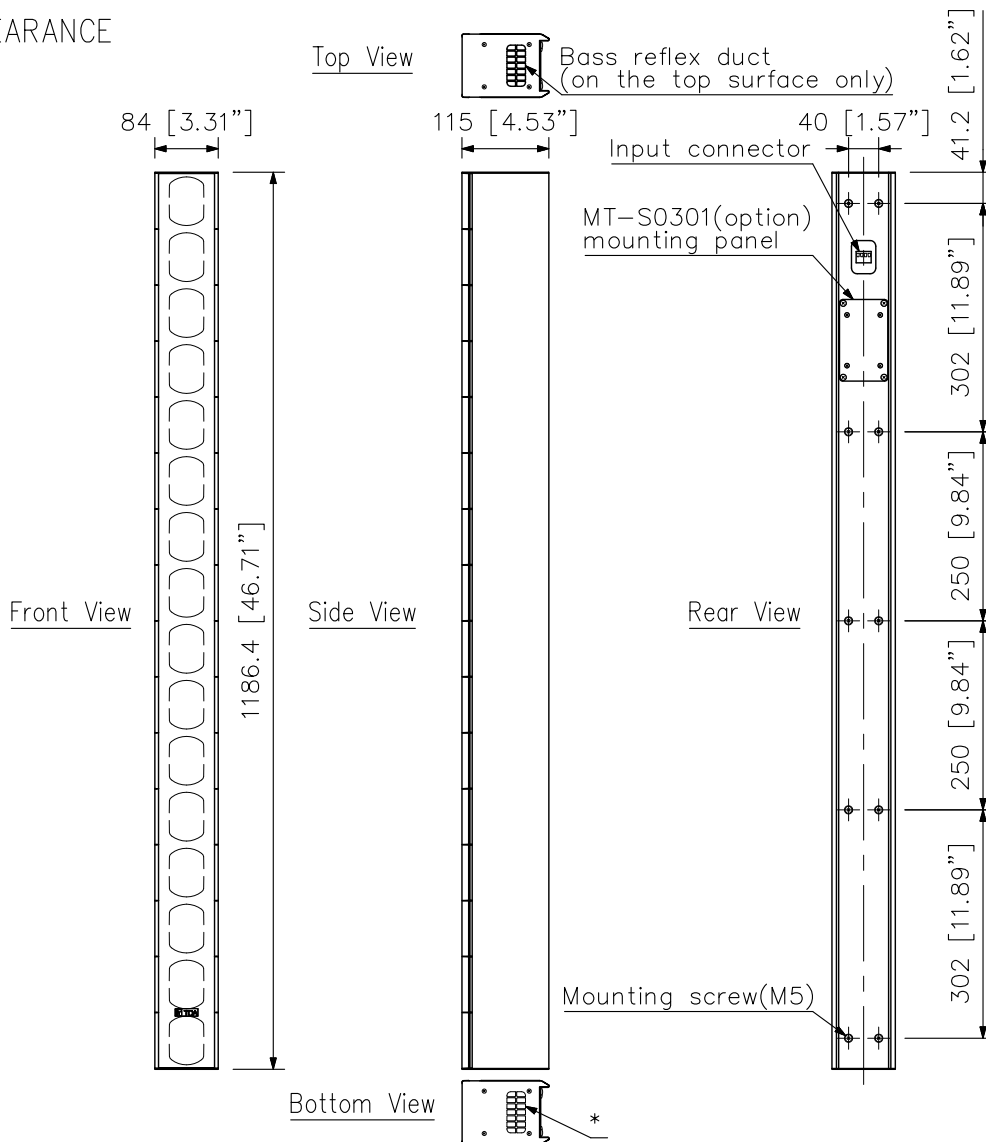

* This recessed part on the bottom surface does not function as a bass reflex duct.

UNIT:mm SCALE:1/10