


DESCRIPTION

The TS-772 is a Delegate unit for TOA Conference system, of which compact and lightweight design makes it easy to install and store. Placing the speech button in the ON position permits speech and disables the speaker to prevent feedback. If the speech button is placed in the OFF position, the microphone cannot be used but the speaker is turned on, allowing the voices from other conference units to be monitored. Two types of dedicated microphones are made available for the TS-772 as optional products: the TS-773 standard type and the TS-774 long type.

SPECIFICATIONS

Power Source	35 V DC, under 30 mA (supplied from Central Unit)
Output	Headphone/Recording: 32 Ω (headphone)/10 kΩ, -20 dB* (recording), unbalanced, mini jack (with VR) Internal speaker: 130 Ω, 200 mW Contact output: 24 V DC, max. 50 mA
Control	Microphone, speaker on-off control by speech switch
Operating Temperature	0°C to +40°C (32°F to 104°F)
Operating Humidity	Under 90% RH (no condensation)
Finish	Case: ABS resin, black Panel: ABS resin, gray metallic, semi-gloss, paint
Dimensions	114.5 (W) × 78.4 (H) × 152.9 (D) mm (4.51" × 3.09" × 6.02")
Weight	780 g (1.72 lb)
Option	Microphone: TS-773 (standard), TS-774 (long) (select either one)

APPEARANCE

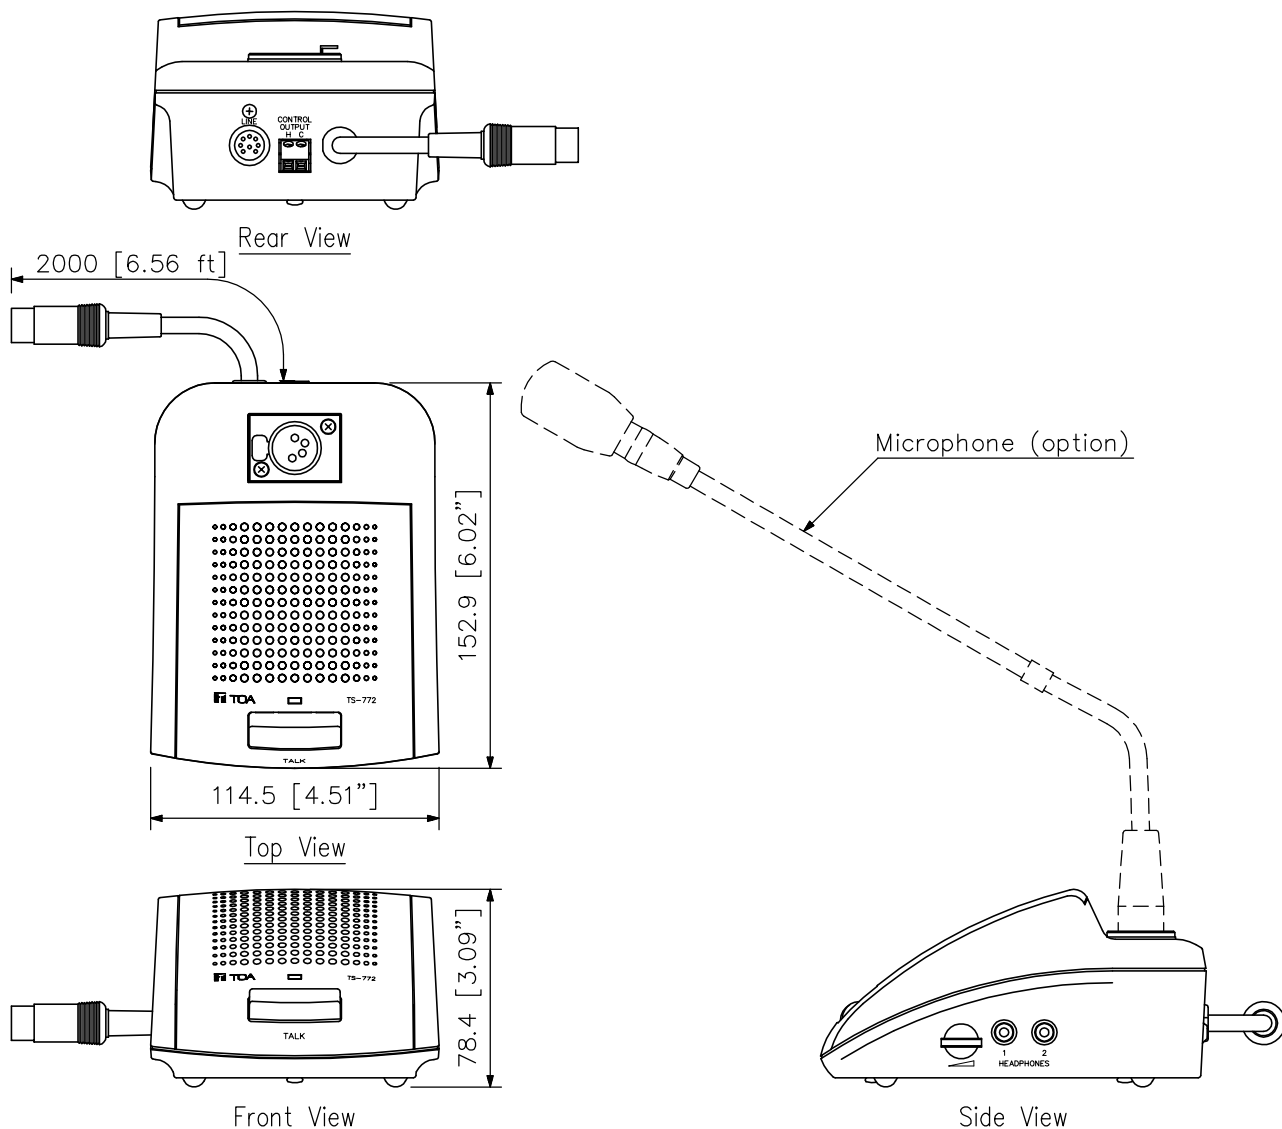

UNIT:mm SCALE:1/3