

MICROPHONES


TS-903 TS-904

Thank you for purchasing TOA's Microphones.
Please carefully follow the instructions in this manual to ensure long, trouble-free use of your equipment.

1. GENERAL DESCRIPTION

The TS-903 and TS-904 Microphones are designed for exclusive use with the Chairman units TS-801 and TS-901, and the Delegate units TS-802 and TS-902 of the TOA Infrared Conference Systems. The TS-903 is of standard type, and the TS-904 is of long type.

2. INSTALLATION

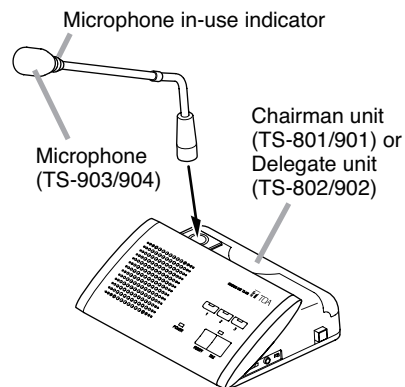

3. SPECIFICATIONS

Model No.	TS-903	TS-904
Type	Electret condenser microphone	
Directivity	Unidirectional	
Rated Impedance	1.8 kΩ	
Rated Sensitivity	-37 dB (1 kHz, 0 dB = 1 V/Pa)	
LED Indicator	Speech (lighting) / low battery (flashing) indicator (ring type)	
Frequency Response	100 – 13,000 Hz	
Output Connector	XLR-4-32 type	
Finish	Gooseneck: Stainless steel, black Other: ABS resin, black	
Length	368 mm	518 mm
Weight	90 g	105 g
Applicable Unit (Option)	Chairman unit: TS-801, TS-901, Delegate unit: TS-802, TS-902	

Note: The design and specifications are subject to change without notice for improvement.

Traceability Information for Europe (EMC directive 2004/108/EC)

Manufacturer:
TOA Corporation
7-2-1, Minatojima Nakamachi, Chuo-ku, Kobe, Hyogo,
Japan

Authorized representative:
TOA Electronics Europe GmbH
Suederstrasse 282, 20537 Hamburg,
Germany