


■DESCRIPTION

The TT-104B is a program timer that comes with 4 outputs and controls 4 different broadcasts. With use of an optional rack-mounting bracket, it can be mounted in an EIA Standard equipment (occupying 1 unit size).


■SPECIFICATIONS

Power Source	220 - 240 V AC, 50/60 Hz
Power Consumption	3 W
Displayed Contents	Day of the week, hour and minute
Programmable Item	Day of the week, hour, minute, output channel
Number of Channels	4 channels (A,B,C,D)
Output System	No-voltage (DRY) make contact (5-second pulse make output)
Output Capacity	24 V DC, 0.5 A
Output Terminal	M4 screw terminal, distance between barriers: 9 mm
Program Capacity	30 steps per channel
Clock Accuracy	±5 seconds per month (25°C)
Power Outage Protection Period	100 hours
Operating Temperature	0°C to +50°C
Finish	Panel: Aluminum, black, 30% gloss, paint Case: Pre-coated steel plate, black
Dimensions	420 (W) × 47.5 (H) × 246.5 (D) mm
Weight	2.5 kg
Option	Rack-mounting bracket: MB-15B


■APPEARANCE

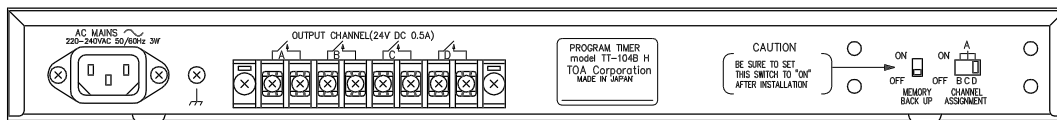

Rear View

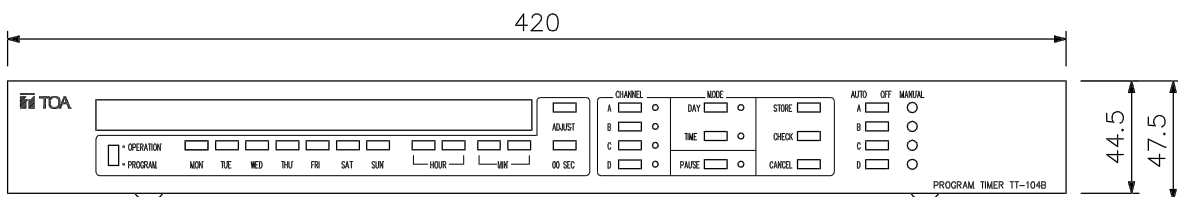

Front View

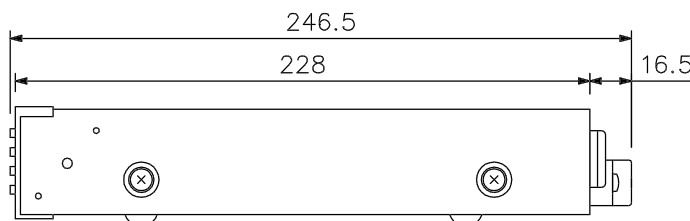

Side View

UNIT:mm SCALE:1/3