

## DESCRIPTION


Designed for exclusive use with the 9000M2 Series amplifier or M-864D, the ZM-9011 is a wall mounted remote control panel having 4 buttons. It is used in conjunction with the RC-001T Remote control module or M-864D. It can be mounted in an American standard 1-gang electrical box in the wall.

## SPECIFICATIONS

|                       |   |
|-----------------------|---|
| Power Source          | 24 V DC (supplied from RC-001T or M-864D)   |
| Current Consumption   | 50 mA or less   |
| Terminal              | Removable terminal block (10 pins)  |
| Connection Cable      | Shielded CPEV cable (paired data line and paired power line) or Category 5 twisted pair cable for LAN (CAT5-STP)                              |
| Operating Section     | 4 function buttons  |
| Indicator             | 4 function indicators (green LEDs)  |
| Operating Temperature | 0 °C to +40 °C (32 °F to 104 °F)  |
| Operating Humidity    | 35 % to 80 %RH (no condensation)  |
| Finish                | Surface-treated steel plate, white, paint   |
| Dimensions            | 72 (W) X 127 (H) X 49.5 (D) mm (2.83" X 5" X 1.95")   |
| Weight                | 160 g (0.35 lb)   |
| Accessory             | Box mounting screw (No.6-32UNC X 30) ×2,<br>Box mounting screw (M4 X 30) ×2, Panel mounting screw ×2,<br>Removable terminal plug (10 pins) ×1 |

Note: Since no electrical box is supplied with the unit, prepare it separately.

## APPEARANCE

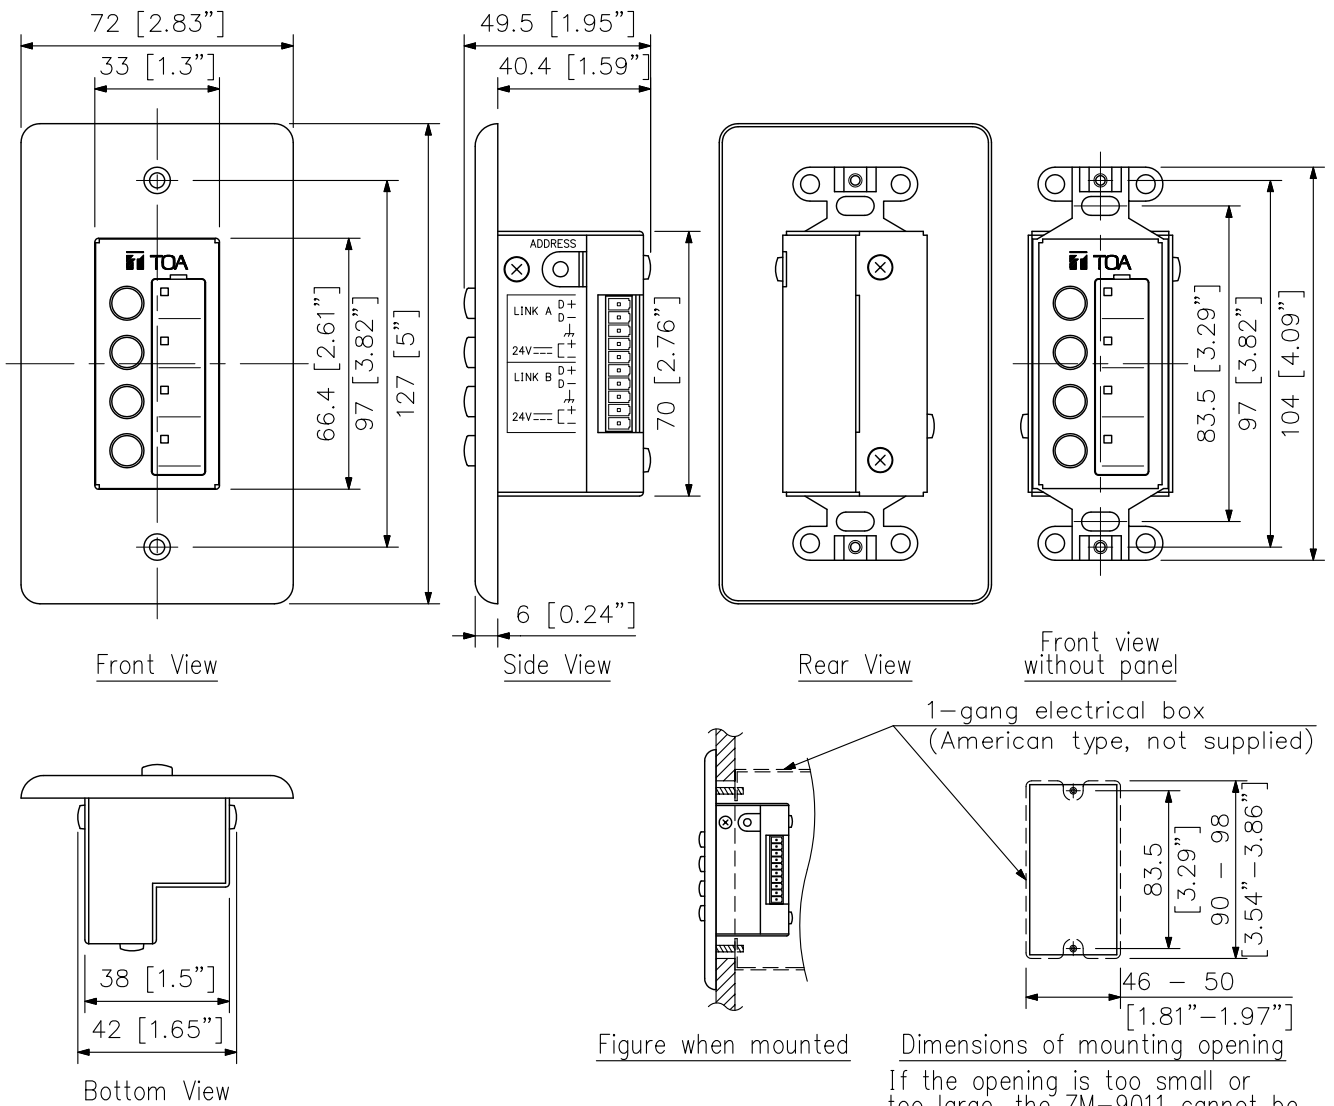

If the opening is too small or too large, the ZM-9011 cannot be mounted in the wall. Be sure to make an opening with dimensions given above when mounting.

UNIT:mm SCALE:1/2