

DESCRIPTION

Designed for exclusive use with the 9000M2 Series amplifier or M-864D, the ZM-9013 is a wall mounted remote control panel having 8 buttons. It is used in conjunction with the RC-001T Remote control module or M-864D.

It can be mounted in an American standard 2-gang electrical box in the wall.

SPECIFICATIONS

Power Source	24 V DC (supplied from RC-001T or M-864D)
Current Consumption	50 mA or less
Terminal	Removable terminal block (10 pins)
Connection Cable	Shielded CPEV cable (paired data line and paired power line) or Category 5 twisted pair cable for LAN (CAT5-STP)
Operating Section	8 function buttons
Indicator	8 function indicators (green LEDs)
Operating Temperature	0 °C to +40 °C (32 °F to 104 °F)
Operating Humidity	35 % to 80 %RH (no condensation)
Finish	Surface-treated steel plate, white, paint
Dimensions	120 (W) × 127 (H) × 50.5 (D) mm (4.72" × 5" × 1.99")
Weight	300 g (0.66 lb)
Accessory	Box mounting screw (No.6-32UNC × 30) ...4, Box mounting screw (M4 × 30) ...4, Panel mounting screw ...4, Removable terminal plug (10 pins) ...1

Note: Since no electrical box is supplied with the unit, prepare it separately.

APPEARANCE

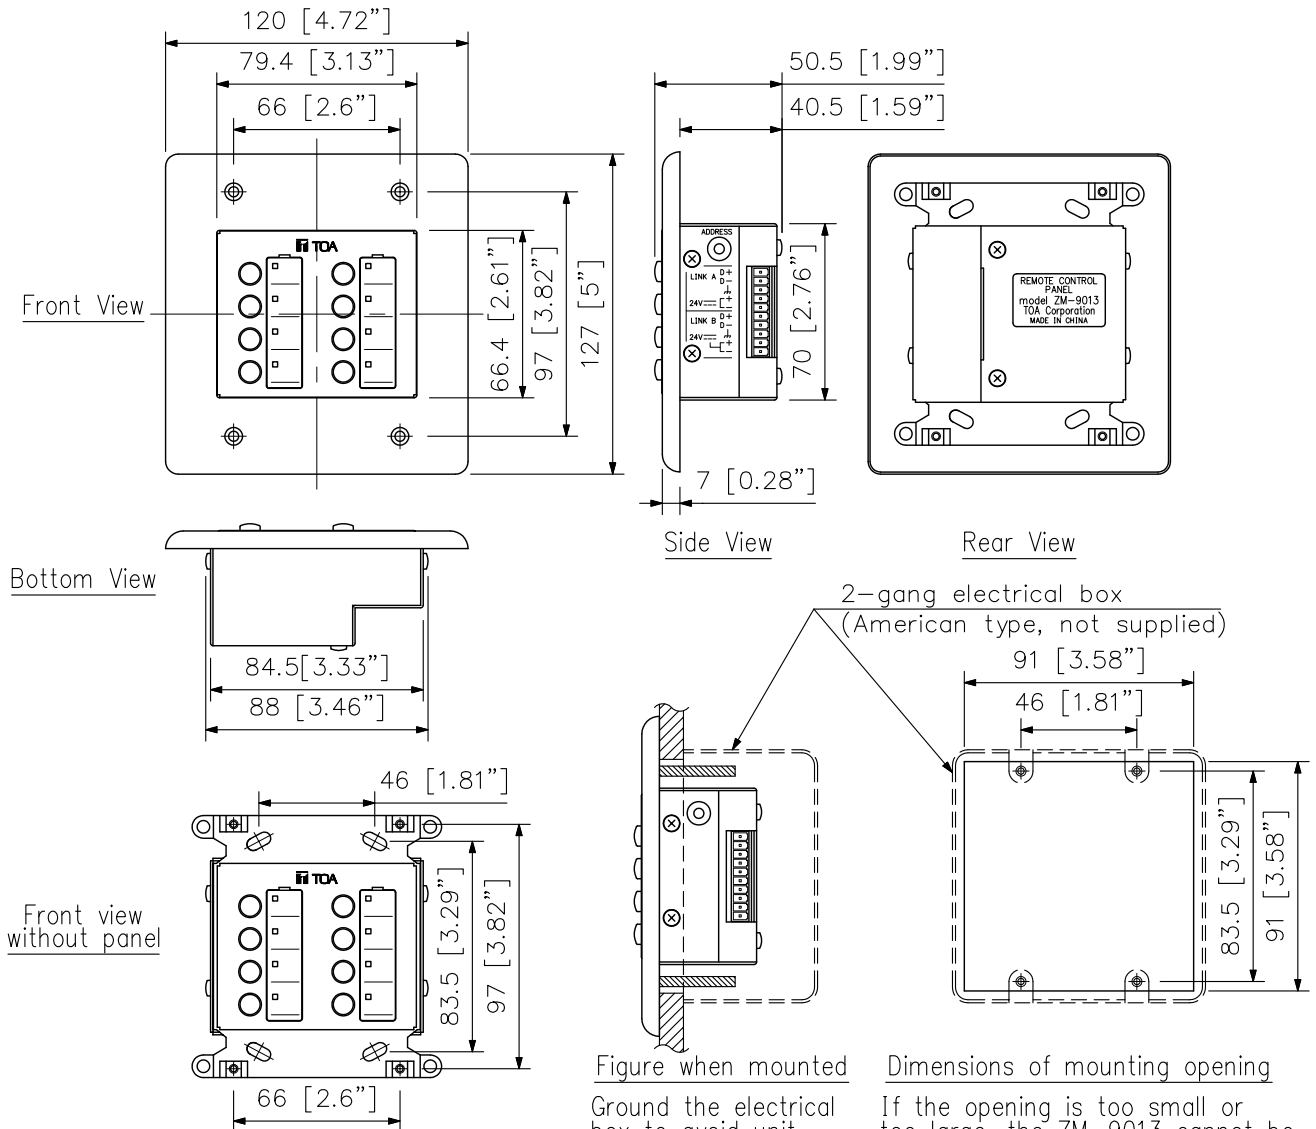


Figure when mounted

Ground the electrical box to avoid unit malfunction due to static electricity.

Dimensions of mounting opening

If the opening is too small or too large, the ZM-9013 cannot be mounted in the wall. Be sure to make an opening with dimensions given above when mounting.

UNIT:mm SCALE:1/3