ITOA MEGAPHONE (WITH WHISTLE SIGNAL) ER-2230W/(EU)

■DESCRIPTION

The ER-2230W is a shoulder megaphone having facilities of EXT. mic input, an AUX input, a DC power input, a battery meter whistle sound. It can be mounted to the optional ST-16A speaker stand. Its microphone assembly are given germ-resistant treatment. The newly developed polyimide diaphragm is employed to ensure high sound quality.

■ SPECIFICATIONS

(*1) 0 dB = 1 V

Power Source	Battery: R20P (D) × 10 (15 V DC)
	External Power: 12 V DC Battery
Rated Output	30 W
Maximum Output	45 W
Signal Sound	Whistle (1.6 to 2.4 kHz)
Battery Life	Voice: Approx. 17 hours (JEITA (*2)), Whistle: Approx. 90 min. (JEITA (*2))
Audible Range	Voice: Approx. 800 m (JEITA (*2)), Whistle: Approx. 1000 m (JEITA (*2))
AUX Input Sensitivity	-10 dB (*1) (300 mV), 10 k Ω (Ø3.5 mini jack, stereo plug acceptable) ,
	volume control
EXT. Mic Input	600 Ω, unbalanced, Ø6.3 phone jack, volume control
Diaphragm	Polyimide film (voice coil, bobbin)
Anti-bacteria Treatment	Microphone
Remaining Battery Indication	
	Steady ON: Normal use, Flashing: Batteries need replacement
Operating Temperature	−10 °C to +40 °C
Finish	Horn ring: Vinyl chloride, gray
	Horn: Aluminum, light gray, paint
	Case top: Die—cast aluminum, gray, paint
	Strap: Nylon, black, Others: ABS resin, gray
Dimensions	Ø351 × 512 mm
Weight	3.6 kg (without batteries) , Microphone: 150 g
Accessory	Ø3.5 mini plug (AUX input)···1, External power supply cord (1 m)···1,
	Splash-proof cover···1 (*3)
Option	Speaker stand: ST-16A, Microphone: DM series


(*2) JEITA: Japan electronics and information technology industries association. (EIAJ TT-4501A) (*3) Do not use the unit in heavy rains or strong winds, or in locations where the unit is directly exposed to water even using with the supplied splash—proof cover.

Note: Batteries are optional.

■ APPEARANCE

<Note on the audible range and battery life>

- 1. The indications of the audible range and battery life are based on the JEITA Standard (*2).
- 2. Audible Range presumes that the megaphone employs new batteries and is used on a quiet street. It varies depending on such conditions as battery consumption, ambient noise, wind direction and obstacles.
- 3. Battery Life assumes that megaphone is used for 30 minutes a day.

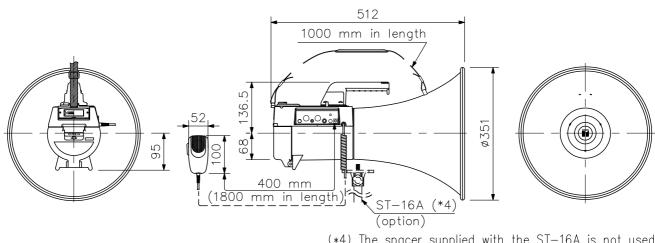

(*4) The spacer supplied with the ST-16A is not used.

Side View Front View

UNIT: mm SCALE: 1/10

Rear View